

COATING ADDITIVES

PRODUCT OVERVIEW



MEET THE WORLD'S MOST EXPERIENCED ROOKIE.

The world's most experienced rookie – that's us. The Coating Additives business line of Evonik. We combine decades of expertise with the enthusiasm and dedication of a start-up. With the united powers of Silica products, TEGO® additives, and specialty additives of former Air Products, we offer innovative and tailor-made solutions that deliver real value for your coating formulations.

Over 500 products, approximately 450 employees, and 30 production and research sites across the globe make up our new business line. Its diverse product portfolio contains additives, co-binders, matting agents, rheology control additives, specialty resins, and nanoresins.

Our world-famous brands include ACEMATT®, AEROSIL®, SURFYNOL®, and TEGO®. Our technology platform is one of its kind in the world and it allows innovative solutions to be developed for almost all challenges that may arise in the formulation of paints and coatings. The wide range of product solutions helps both in the formulation and manufacture of coatings and in their application.

Coating Additives is already a leading market provider of additives for water-based paints, and the business line is continuously expanding its position in the area of solvent-based paints as well.

COATING ADDITIVES OF EVONIK.
HOME OF ACEMATT®, AEROSIL®, SURFYNOL® AND TEGO®.
AND MUCH MORE.

ACEMATT[®], ADDID[®],
AEROSIL[®], AIRASE[®],
ALBIDUR[®], CARBOWET[®],
DYNOL[™], NANOCRYL[®],
SILIKOFTAL[®], SILIKOPHEN[®],
SILIKOPON[®], SILIKOPUR[®],
SILIKOTOP[®], SURFYNOL[®],
TEGO[®], TEGOMER[®],
ZETASPERSE[®]

03	ABOUT COATING ADDITIVES	30	CO-BINDERS
06	ADDITIVES	30	TEGO® VariPlus
06	Deaerators	31	TEGO® AddBond
07	Defoamers	32	SPECIALTY BINDERS
10	Wetting and dispersing additives	32	Silicone-epoxy resins
14	Stabilizing surfactants and polymeric dispersants	33	Silicone resins
16	Surface control additives	34	Silicone polyester resins
18	Matting agents	35	High solids silicone hybrid resins
20	Radiation-curing multifunctional additives	36	Silicone modified polyurethane emulsion
21	Substrate wetting and anti-cratering additives	37	Reactive silicone-based resin components
24	Rheology control	38	NANORESINS
26	Free-flow agents for powder coatings	38	NANOCRYL®
27	Hydrophobing agents	39	ALBIDUR®
28	Anti-graffiti additives		

ADDITIVES

DEAERATORS

Deaerators prevent the formation of air inclusions and pinholes in waterborne, solventborne and radiation-curing coatings. This is particularly important in high viscosity or high solids formulations and essential for airless/airmix application in high film thickness.




Deaerators

Product	Waterborne	UV	UV PU/waterborne	Solventborne	2-pack solvent-free	High solids	Pigmented	Unpigmented	2-pack-epoxy	2-pack PU	Acrylate	Alkyd	Alkyd/melamine	NC	Polyester/melamine	PU/acrylic	Acid-curing	Styrene-acrylic	UPF	UV acrylate	
TEGO® Airex 900		•		•	•	•	•		•											•	
TEGO® Airex 901 W	•						•	•			•					•					
TEGO® Airex 902 W	•		•					•		•	•	•	•		•	•	•	•			
TEGO® Airex 904 W	•		•				•	•			•	•				•	•				
TEGO® Airex 910 ¹		•		•	•			•	•											•	•
TEGO® Airex 920 ¹		•					•	•													•
TEGO® Airex 921 ¹		•					•	•													•
TEGO® Airex 922 ¹				•	•	•	•	•	•	•	•	•									
TEGO® Airex 931				•		•	•	•	•	•	•	•	•	•	•	•	•	•			
TEGO® Airex 940				•	•		•	•	•	•	•	•								•	
TEGO® Airex 944				•	•	•	•	•	•	•	•	•								•	
TEGO® Airex 950				•		•		•						•		•				•	
TEGO® Airex 990	•			•	•	•	•		•	•	•	•	•		•				•	•	
TEGO® Airex 991				•	•	•	•	•		•	•	•									
TEGO® Foamex 840				•							•										
TEGO® Foamex 860				•			•	•	•		•										
TEGO® Foamex N		•		•	•	•		•		•										•	

¹ silicone-free

DEFOAMERS

Defoamers prevent foam formation during production and application of waterborne coatings and printing inks. Pre-existing foam is destroyed and air inclusions are prevented.

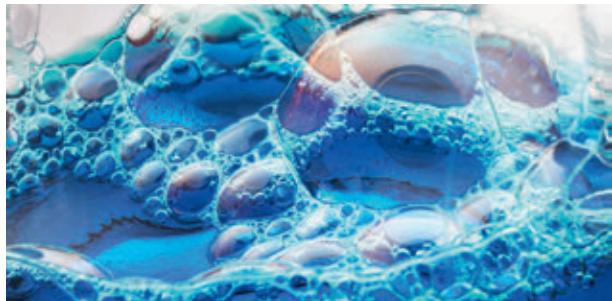

Defoamers

Product	Grinding stage	Let-down stage	Pigmented	Unpigmented	2-pack epoxy	2-pack PU	Acrylate	Alkyd	Polyester	PU	PU/acrylic	Styrene acrylic	Vinyl acetate	Others
TEGO® Foamex 10 ¹	●	●	●				●	●				●	●	
TEGO® Foamex 12 ¹		●	●				●					●	●	
TEGO® Foamex 20 ¹	●	●	●	●			●					●	●	
TEGO® Foamex 22 ¹	●	●	●	●			●					●	●	
TEGO® Foamex 24 ¹	●	●	●	●			●	●				●	●	
TEGO® Foamex 26 ¹	●		●				●	●				●	●	
TEGO® Foamex 28 ¹		●	●	●			●	●		●	●	●	●	
TEGO® Foamex 30 ¹	●	●	●				●					●	●	
TEGO® Foamex 32 ¹	●	●	●				●					●	●	
TEGO® Foamex 34 ¹	●		●				●					●	●	
TEGO® Foamex 1488	●	●	●	●	●		●					●	●	
TEGO® Foamex 3062	●		●									●	●	
TEGO® Foamex 7447		●	●	●			●					●		
TEGO® Foamex 800	●	●	●	●			●	●				●		
TEGO® Foamex 8030	●	●	●		●		●					●	●	
TEGO® Foamex 805 N		●		●			●	●	●	●	●	●		
TEGO® Foamex 8050	●		●				●					●		
TEGO® Foamex 810	●		●	●			●	●				●	●	
TEGO® Foamex 815 N		●	●		●		●	●	●			●		
TEGO® Foamex 822		●	●	●			●	●	●		●	●	●	●
TEGO® Foamex 823		●	●	●			●	●	●		●	●	●	
TEGO® Foamex 825		●	●	●			●	●				●	●	
TEGO® Foamex 830 ²	●	●	●	●			●	●		●	●			
TEGO® Foamex 833 ²	●	●	●	●			●		●		●	●		●
TEGO® Foamex 835	●	●	●									●		

Additives

Product	Grinding stage	Let-down stage	Pigmented	Unpigmented	2-pack epoxy	2-pack PU	Acrylate	Alkyd	Polyester	PU	PU/acrylic	Styrene acrylic	Vinyl acetate	Others
TEGO® Foamex 840	•	•	•	•	•		•	•		•		•		
TEGO® Foamex 842	•	•	•	•			•					•		
TEGO® Foamex 843		•	•				•			•		•		•
TEGO® Foamex 845		•	•	•			•		•			•		
TEGO® Foamex 855	•	•	•				•					•	•	
TEGO® Foamex 860	•	•	•	•			•			•		•	•	
TEGO® Foamex 883	•		•				•					•	•	
TEGO® Foamex K 3 ²	•		•				•					•	•	
TEGO® Foamex K 7 ²	•		•	•			•	•				•	•	
TEGO® Twin 4000		•	•	•			•	•			•	•		•

¹ new ² silicone-free

Traditional Defoamers

PRODUCT	COATINGS AND PAINTS						INKS AND GRAPHIC ARTS						
	Architectural	Industrial & Maintenance	Automotive	Specialty paper	Plastic	Wood	Powder	Pigment dispersions (base)	Pigment dispersion (colourant)	Inks	Fountain solutions		
AIRASE® 5100	••	•					••	••	••		••	••	
AIRASE® 5200	••	•					••	••	••		••	••	
AIRASE® 5300	••	••			•	•	•	•	•	•	••	••	•
AIRASE® 5355				••			••	••	••	••	••	••	••
SURFYNOL® DF-695										••			
AIRASE® 4500	••	••	•				••	••	••	••	••	••	•
AIRASE® 5400	••	•	•		•	•	•	•	•	••	••	••	•
AIRASE® 4655										•	•	•	•
SURFYNOL® DF-220	••		•	•			••	••	••		••		
SURFYNOL® DF-58	••	••			••	••	••	••	••	•	••	•	•

PRODUCT	COATINGS AND PAINTS							INKS AND GRAPHIC ARTS						
	Architectural	Industrial & Maintenance	Automotive	Specialty paper	Plastic	Wood	Powder	Pigment dispersions (base)	Pigment dispersion (colourant)	Inks	Fountain solutions	Overprint varnishes	Pigment dispersions (resinated)	Pigment dispersions (resin-free)
AIRASE® 8070	••	•••	•		•	••		••	••	•		•	•	•
AIRASE® 5500	•	•••	•			••			•	••		•	•	••
SURFYNOL® DF-62	•				••	••				••				
SURFYNOL® DF-37		•				•				•	•			
AIRASE® 5600	•	••	•		•	••				••		•		•
AIRASE® 5655										••		•	•	•
SURFYNOL® DF-178		•	•		••	••						•		•
AIRASE® 5700		•	•		••	••				•		•		

All products may not be available in all regions. Please contact your local supplier for availability.

•• Top recommendations • Secondary options

Molecular defoamers

PRODUCT	COATINGS AND PAINTS							INKS AND GRAPHIC ARTS						
	Architectural	Industrial & Maintenance	Automotive	Specialty paper	Plastic	Wood	Powder	Pigment dispersions (base)	Pigment dispersion (colourant)	Inks	Fountain solutions	Overprint varnishes	Pigment dispersions (resinated)	Pigment dispersions (resin-free)
SURFYNOL® DF-110*	•••	•••	•••	••	••			••	••	•	••	••	••	••
SURFYNOL® AD01	•••	•••	•••	•••	•	•		••	••	••	••	••	••	••
SURFYNOL® 107L	•••	•••	•••	•••	•	•		••	••	••	••	••	••	••
SURFYNOL® MD-20	•••	•	•••	•••	••	••		••	••	•	•	•	••	••
SURFYNOL® 104*	•••	•••	•••	••	••	••	••	•	•	••	•	•	•	•
SURFYNOL® 420	•••	•••	•••	••	••	••		•	•	••	•	••	••	••
SURFYNOL® PC				••										

* This product is available in different forms.

All products may not be available in all regions. Please contact your local supplier for availability.

•• Top recommendations • Secondary options

WETTING AND DISPERSING ADDITIVES

Wetting and dispersing additives promote pigment wetting and stabilization. They prevent floating, flooding, and settling of pigments so that color coverage and intensity remain consistent during storage. At the same time, they ensure maximum color yield for the pigment while minimizing the number of milling steps. Since these additives lower viscosity, coatings and pigment concentrates can be produced cost-effectively because pigment concentration can be maximized during dispersion.



Wetting and Dispersing Additives for Pigment Concentrates

Product	Waterborne	Polar solvents	Non-polar solvents	2-pack solvent-free	Universal pigment concentrates	Binder-containing	Binder-free	Carbon blacks	Organic pigments	Inorganic pigments	Fillers
TEGO® Dispers 628		•	•			•			•	•	•
TEGO® Dispers 650	•	•	•	•	•	•	•	•	•		
TEGO® Dispers 651	•				•	•	•	•	•	•	•
TEGO® Dispers 652	•	•		•	•	•	•			•	•
TEGO® Dispers 653	•				•	•	•	•	•	•	•
TEGO® Dispers 655	•	•	•	•	•	•	•		•	•	•
TEGO® Dispers 656	•	•	•	•	•	•	•		•	•	•
TEGO® Dispers 660 C	•				•		•			•	•
TEGO® Dispers 662 C		•	•			•		•	•	•	
TEGO® Dispers 670		•				•	•	•	•	•	•
TEGO® Dispers 671		•	•			•		•	•	•	
TEGO® Dispers 672		•				•		•	•	•	
TEGO® Dispers 673 ¹		•		•		•		•	•		
TEGO® Dispers 675 ¹		•	•	•		•		•	•	•	•
TEGO® Dispers 676 ¹		•	•			•		•	•	•	•


Product	Waterborne	Polar solvents	Non-polar solvents	2-pack solvent-free	Universal pigment concentrates	Binder-containing	Binder-free	Carbon blacks	Organic pigments	Inorganic pigments	Fillers
TEGO® Dispers 685
TEGO® Dispers 688
TEGO® Dispers 690 ¹
TEGO® Dispers 710	
TEGO® Dispers 715 W
TEGO® Dispers 740 W		
TEGO® Dispers 745 W
TEGO® Dispers 747 W ¹
TEGO® Dispers 750 W
TEGO® Dispers 752 W
TEGO® Dispers 755 W
TEGO® Dispers 757 W
TEGO® Dispers 760 W		
TEGO® Dispers 761 W		
TEGO® Dispers 765 W
TEGO® Dispers 1010 ¹		
COLOROL F		
LIPOTIN® A
LIPOTIN® DB		

¹ new

Wetting and Dispersing Additives for Direct Grind

Product	Waterborne	Solventborne	2-pack solvent-free	High solids	UV	2K EP	2K PU	PES	Acrylate	Alkyd	PU	Styrene acrylic	Vinyl acetate copolymer	Organic pigments/carbon black	Inorganic pigments/fillers	Mixed pigmentation (inorg./org.)	Remark
TEGO® Dispers 610	
TEGO® Dispers 610 S ²	good anti-settlement effect
TEGO® Dispers 628	effective viscosity reduction in epoxy systems
TEGO® Dispers 630	very good anti-sagging properties
TEGO® Dispers 650	
TEGO® Dispers 651	
TEGO® Dispers 652	good anti-sagging properties
TEGO® Dispers 653	
TEGO® Dispers 655	
TEGO® Dispers 656	
TEGO® Dispers 670	universal use
TEGO® Dispers 671	
TEGO® Dispers 672	excellent storage stability in epoxy systems
TEGO® Dispers 673	
TEGO® Dispers 675	very good for coil coating applications
TEGO® Dispers 678	excellent storage stability in 2-pack PU systems
TEGO® Dispers 685	
TEGO® Dispers 688	excellent in stabilization of matting agents
TEGO® Dispers 690	
TEGO® Dispers 700	best for bentonite pastes
TEGO® Dispers 710	
TEGO® Dispers 715 W	
TEGO® Dispers 740 W	

Product	Waterborne	Solventborne	2-pack solvent-free	High solids	UV	2K EP	2K PU	PES	Acrylate	Alkyd	PU	Styrene acrylic	Vinyl acetate copolymer	Organic pigments/carbon black	Inorganic pigments/fillers	Mixed pigmentation (inorg./org.)	Remark
TEGO® Dispers 745 W	●					●			●		●			●	●	●	
TEGO® Dispers 750 W	●				●	●			●	●	●	●		●	●	●	
TEGO® Dispers 752 W	●								●		●	●	●	●			highly suitable for transparent iron oxides
TEGO® Dispers 755 W	●				●	●	●	●	●	●	●	●	●	●	●	●	
TEGO® Dispers 757 W	●					●	●	●	●	●	●	●	●	●	●	●	excellent salt spray resistance
TEGO® Dispers 760 W	●					●	●	●	●			●			●		
TEGO® Dispers 761 W	●					●	●	●	●			●		●			
TEGO® Dispers 765 W	●					●	●							●	●	●	
TEGO® Dispers 1010 ¹		●												●	●	●	
COLOROL F		●								●				●	●	●	
LIPOTIN® A	●								●	●					●		
LIPOTIN® DB		●								●				●	●	●	

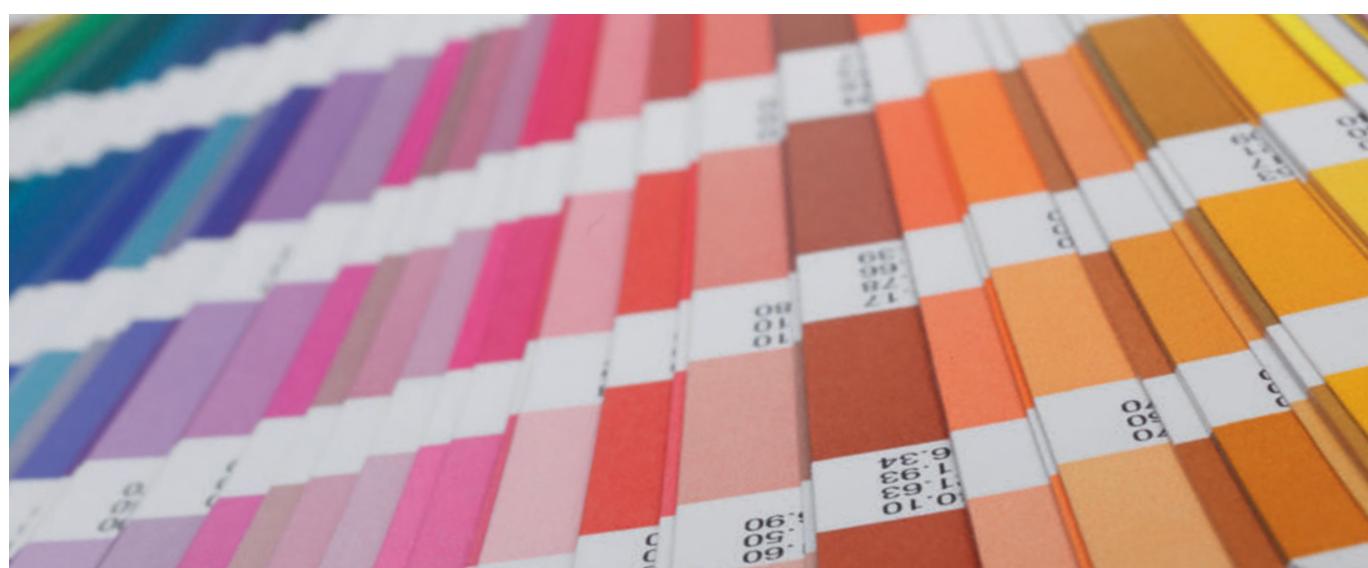¹ new ² containing silicone

Stabilizing Surfactant and Polymeric Dispersants

Product	Waterborne	Polar solvents	Non-polar solvents	2-pack solvent-free	Universal pigment concentrates	Binder-containing	Binder-free	Carbon blacks	Organic pigments	Inorganic pigments	Fillers
ZETASPERSE® 170	• •	•		•	• •			• •	•	• •	•
ZETASPERSE® 179	• •				•	• •		• •	• •	• •	• •
ZETASPERSE® 182	• •			•	• •			• •	• •	• •	• •
ZETASPERSE® 1200**	• •					• •			•	• •	• •
ZETASPERSE® 2300**	• •				•	• •	• •	• •	•	• •	• •
ZETASPERSE® 2500**	• •			•	• •	• •	• •	• •	• •		
ZETASPERSE® 3100**	• •					• •	• •	• •	•	• •	• •
ZETASPERSE® 3400**	• •					• •	•	•	• •	•	•
ZETASPERSE® 3600**	• •			•	• •	• •	• •	• •	•	•	•
ZETASPERSE® 3700**	• •					• •	•	• •			
ZETASPERSE® 3800**	• •			•	•	• •	• •	• •	• •	• •	• •

** For specific pigment dispersant recommendations, use the FAZT tool at FAZT.com or contact Evonik.

All products may not be available in all regions. Please contact your local supplier for availability.

• Top recommendations • Secondary options



SURFACE CONTROL ADDITIVES

Surface control additives improve the flow/leveling and reduce cratering. They prevent pigment flooding and flotation. Slip and anti-blocking of a coating can be adjusted.



Surface Control Additives

Product	Waterborne	UV	Solventborne	Slip	Leveling	Low foaming	Compatible	Recoatable	Anti-blocking/scratch-resistance	Remark
TEGO® Flow 300 ²				
TEGO® Flow 375 ^{1,2}				
TEGO® Flow 425		
TEGO® Flow 460 N ^{1,2}			
TEGO® Flow ATF 2			.	.					.	anti-crater effect
TEGO® Glide 100		flow/leveling
TEGO® Glide 110			anti-crater effect
TEGO® Glide 130			
TEGO® Glide 406		flow/leveling
TEGO® Glide 410	
TEGO® Glide 415				

Product	Waterborne	UV	Solventborne	Slip	Leveling	Low foaming	Compatible	Recoatable	Anti-blocking/scratch-resistance	Remark
TEGO® Glide 432					
TEGO® Glide 435		.		.	.					
TEGO® Glide 440			
TEGO® Glide 450		
TEGO® Glide 482	anti-blocking
TEGO® Glide 490 ¹	
TEGO® Glide 492 ¹	
TEGO® Glide 494 ¹	
TEGO® Glide A 116 ¹			
TEGO® Glide B 1484				
TEGO® Glide ZG 400				

¹ new ² silicone-free

Main application fields for ACEMATT®

Application	HK 125	HK 400	HK 440	HK 450	790	810	3600	OK 412	OK 500	OK 520	OK 607	OK 900	TS 100	3300
Wood, clear (painter-lacquers, stains)								○	○	●	○		●	●
Wood, pigmented (painter-lacquers, stains)		●			○	●	○	●	●	●	●	○	○	○
Wood Industrial, clear (Furniture, parquet, stains)							●	○	○	●	○		●	●
Wood Industrial, pigmented (Furniture, parquet, stains)		●			○	●	○	●	●	●	●	●	○	○
Flooring	○	○	○	○	○	○		○	○	○		●	●	●
Industrial		●	○	○	●	○		●	●	●	●	●	○	○
Automotive		●				○		●	●	●	●	○	●	●
Can Coating		●				●		●	●	●	●		○	
Coil Coating	○	○	●	●	●	●		●	●	○	●			
Leather		○						●	●	●	●		●	●
UV							●	○	○	○	●		○	○
Plastics								●	●	●	●		●	●

Printing inks

Relief Flexo (OPV*)	●				●		●	●	●		●	●	○	
Gravure (OPV*)	●				●		●	●	●		●	●	○	
Off-set (OPV*)							●	●	●		●			
Silk/Screen Printing							●	●	●				●	●

OPV* – Overprint-Varnishes

● Very suitable ○ Suitable

MATTING AGENT REQUIREMENTS

Transparency, surface finish, chemical resistance

Efficiency, surface finish, chemical resistance

Transparency, surface finish, chemical resistance

Efficiency, surface finish, chemical resistance

Abrasion resistance, chemical resistance, non-slip safety

Efficiency, surface finish

Efficiency, surface finish, polishing resistance, chemical resistance

Chemical resistance

Efficiency, non-glaring, chemical resistance

Surface finish, transparency, high jetness

Surface finish, transparency, low thickening effect

Surface finish, transparency, high jetness

Transparency, low thickening effect, efficiency

Transparency, low thickening effect, efficiency

Transparency, efficiency, surface finish

Efficiency

MATTING AGENTS

ACEMATT® matting agents are precipitated or thermal silica with a distinct upper particle size. Therefore, there is no need of any kind of high shear treatment in the process of formulating ACEMATT® into the coating.

ACEMATT® should be added as last position to the formulation, being homogenized with moderate speed. ACEMATT® matting agents are ready to use, easy to process and highly efficient. The product range covers universal applicable grades as well as grades for specific demands.





RADIATION-CURING MULTIFUNCTIONAL ADDITIVES

The **TEGO® Rad** range comprises cross-linkable, acrylate additives for radiation-curing formulations. These multifunctional products improve slip, substrate wetting and anti-cratering, scratch resistance and leveling. In addition, some of the additives have release and defoaming properties.

Radiation-Curing Multifunctional Additives

Product	Waterborne UV		Slip/anti-blocking	Wetting	Flow	Low foaming	Compatible	Recoatable	Release
	UV	Waterborne							
TEGO® Rad 2010	•	•	•	•	•	•			•
TEGO® Rad 2011	•		•	•	•	•	•	•	•
TEGO® Rad 2100	•		•	•	•		•	•	
TEGO® Rad 2200 N	•	•	•	•	•		•		
TEGO® Rad 2250	•	•	•	•	•		•		
TEGO® Rad 2300	•	•	•	•	•	•	•		
TEGO® Rad 2500	•	•				•			•
TEGO® Rad 2650	•	•				•			•
TEGO® Rad 2700	•	•				•			•
TEGO® Rad 2800 ¹	•	•				•			•

¹ new



SUBSTRATE WETTING AND ANTI-CRATERING ADDITIVES

Substrate wetting and anti-cratering additives enable uniform wetting for coatings and printing inks even on very low energy or contaminated surfaces. Good wetting is a fundamental prerequisite for optimum adhesion. Defects in the coating surface such as cratering and poor leveling are minimized or improved.

Substrate Wetting and Anti-Cratering Additives

Product	Waterborne	UV	Solventborne	Static	Dynamic	Anti-crater	Low foaming
TEGO® Twin 4000	●		●	●			●
TEGO® Twin 4100	●	●	●	●		●	●
TEGO® Twin 4200	●	●	●	●	●	●	●
TEGO® Wet 240	●			●		●	
TEGO® Wet 250	●			●		●	
TEGO® Wet 260	●			●		●	
TEGO® Wet 265	●			●		●	●
TEGO® Wet 270	●	●	●	●		●	
TEGO® Wet 280	●		●	●		●	
TEGO® Wet 285 ¹	●			●		●	●
TEGO® Wet 500 ²	●	●			●		●
TEGO® Wet 505 ²	●				●		●
TEGO® Wet 510 ²	●				●		●
TEGO® Wet 550 ^{1,2}	●			●		●	●
TEGO® Wet KL 245	●		●	●		●	

¹ new ² silicone-free

Wetting Agents

PRODUCT	COATINGS AND PAINTS							INKS AND GRAPHIC ARTS						
Multifunctional	Architectural	Industrial & Maintenance	Automotive	Specialty paper	Plastic	Wood	Powder	Pigment dispersions (base)	Pigment dispersion (colourant)	Inks	Fountain solutions	Overprint varnishes	Pigment dispersions (resinated)	Pigment dispersions (resin-free)
SURFYNOL® AD01	••	••	••	••	•	•	•	••	••	••			•	•
SURFYNOL® 107L	••	••	••	••	•	•	•	••	••	••			•	•
SURFYNOL® 104*	••	••	••	••	••	••	••	•	•	••	••	•	•	•
SURFYNOL® 420	••	••	••		••	••	•	•	•	••	••		•	•
SURFYNOL® 440	•	••	•	••	•	••	••			••	••			
SURFYNOL® 465	•	••		••	•						••			
SURFYNOL® 485*		••									•			
SURFYNOL® 2502	•	•	••	••	•	•				••	••	••		

* This product is available in different forms.

All products may not be available in all regions. Please contact your local supplier for availability.

•• Top recommendations • Secondary options

Wetting Agents

PRODUCT	COATINGS AND PAINTS							INKS AND GRAPHIC ARTS						
Superwetters	Architectural	Industrial & Maintenance	Automotive	Specialty paper	Plastic	Wood	Powder	Pigment dispersions (base)	Pigment dispersion (colourant)	Inks	Fountain solutions	Overprint varnishes	Pigment dispersions (resinated)	Pigment dispersions (resin-free)
DYNOL™ 360	••	••	••	••	••	••	•	•	•		••			
DYNOL™ 604			••											
DYNOL™ 607	••	••	••	••	•	•					••			
DYNOL™ 800	••	••	••	•	••	••	•			•		•		
DYNOL™ 810		•	•	•	•	•	•			••		••		
DYNOL™ 960	•	••	•	•	••	••				••		•		
DYNOL™ 980	•	••	•		•	•				•		••		

Wetting Agents

PRODUCT	COATINGS AND PAINTS						INKS AND GRAPHIC ARTS							
Grind Aids	Architectural	Industrial & Maintenance	Automotive	Specialty paper	Plastic	Wood	Powder	Pigment dispersions (base)	Pigment dispersion (colourant)	Inks	Fountain solutions	Overprint varnishes	Pigment dispersions (resinated)	Pigment dispersions (resin-free)
CARBOWET® GA-100	••							••	•				••	••
CARBOWET® GA-200	••	••	••					••	••				••	••
CARBOWET® GA-210	••		••					••	••				••	••
CARBOWET® GA-211	•		••					••	••				••	••
CARBOWET® GA-221			••					•	••				••	••

Wetting Agents

PRODUCT	COATINGS AND PAINTS						INKS AND GRAPHIC ARTS							
Specialty/ Formulated	Architectural	Industrial & Maintenance	Automotive	Specialty paper	Plastic	Wood	Powder	Pigment dispersions (base)	Pigment dispersion (colourant)	Inks	Fountain solutions	Overprint varnishes	Pigment dispersions (resinated)	Pigment dispersions (resin-free)
CARBOWET® LSF	•													
SURFYNOL® 355				•						•		••		
SURFYNOL® FS-85					•	•					••			
SURFYNOL® OP-340												••		
SURFYNOL® PSA336	•			••	••	•				••				
SURFYNOL® SE-F		•	•	•	••	••	••							



RHEOLOGICAL ADDITIVES

The **TEGO® ViscoPlus** product range consists of associative, polyurethane thickeners which satisfy the latest requirements of the industry. All TEGO® ViscoPlus products are liquid and free from organic solvents, alkylphenolethoxylates and organotin compounds. Each TEGO® ViscoPlus product has a different rheological profile. The various products combine easily with each other due to their excellent compatibility.


Rheological Additives

Product	Waterborne	Newtonian	Newtonian, high-shear	Pseudoplastic	Strong Pseudoplastic	Remark
TEGO® ViscoPlus 3000¹	●	●				solvent-free
TEGO® ViscoPlus 3010¹	●		●			solvent-free
TEGO® ViscoPlus 3030¹	●			●		solvent-free
TEGO® ViscoPlus 3060¹	●				●	solvent-free

¹ silicone-free

RHEOLOGY CONTROL

In the paints and coatings industry, AEROSIL® primarily serves as a tool for adjusting rheology during production, storage, and application. AEROSIL® allows to optimize the dispersion characteristics and stability of the pigments used, as well as the flow properties and thickness of applied films.

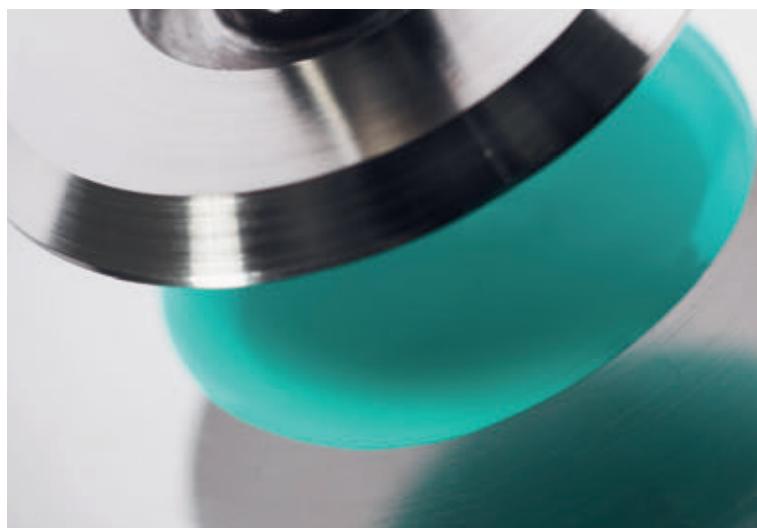

AEROSIL® – an Overview

	Rheology control Anti-sagging	Anti-settling Pigment stabilization	Corrosion protection	Other effects
Solvent-based coatings (2-pack systems)	AEROSIL® R 972 AEROSIL® R 974 AEROSIL® R 805 AEROSIL® R 812 AEROSIL® R 812 S	AEROSIL® R 972 AEROSIL® R 974 AEROSIL® R 805 AEROSIL® R 812 AEROSIL® R 812 S	AEROSIL® R 972 AEROSIL® R 974 AEROSIL® R 805 AEROSIL® R 812 AEROSIL® R 812 S	AEROSIL® R 7200 ¹ AEROSIL® R 9200 ¹ AERODISP® 1030 ¹
Solvent-based coatings (baking and air drying systems)	AEROSIL® 200 AEROSIL® 300 AEROSIL® R 972 AEROSIL® R 974 AEROSIL® R 805 AEROSIL® R 812 AEROSIL® R 812 S	AEROSIL® 200 AEROSIL® R 972 AEROSIL® R 974	AEROSIL® R 972 AEROSIL® R 974 AEROSIL® R 805 AEROSIL® R 812 AEROSIL® R 812 S	AEROSIL® R 7200 ¹ AEROSIL® R 9200 ¹ AERODISP® 1030 ¹
Water-based coatings (clear coats)	AEROSIL® 200 AEROSIL® COK 84 AEROSIL® R 816 AERODISP® WR 8520			
Water-based coatings (pigmented systems)	AEROSIL® 200 AEROSIL® COK 84 AEROSIL® R 974 AEROSIL® R 816 AEROSIL® R 805 AEROSIL® R 812 AEROSIL® R 812 S AERODISP® WR 8520	AEROSIL® 200 AEROSIL® COK 84 AEROSIL® R 816 AEROSIL® R 972 AEROSIL® R 974 AEROSIL® R 805 AEROSIL® R 812 S	AEROSIL® R 816 AEROSIL® R 972 AEROSIL® R 974 AEROSIL® R 805 AEROSIL® R 812 S	
UV-curing coatings	AEROSIL® 200 AEROSIL® R 972 AEROSIL® R 974 AEROSIL® R 711			AEROSIL® R 7200 ¹ AEROSIL® R 9200 ¹
Unsaturated polyester	AEROSIL® 200 AEROSIL® 300 AEROSIL® 380			

¹ scratch resistance improvement

FREE-FLOW AGENTS FOR POWDER COATINGS

Environmental friendly, as solvent-free powder coatings are treated with AEROXIDE® or AEROSIL® as free-flow agents, to avoid complications such as clumping, bridge formation, or differences in coating thicknesses.

Whereas AEROSIL® harnesses the

ball-bearing effect to enhance the flowability of powder coating particles, the AEROXIDE® Alu product line can in addition take on an electropositive charge, which is an essential property for certain methods of application.



General overview of the use of AEROSIL® and AEROXIDE®

Powder Coatings Systems	Products	Concentration in wt%	Effect
Thermosettings Powders	AEROSIL® 200, AEROSIL® 380, AEROSIL® R 972, AEROSIL® R 812, AEROSIL® R 8200 AEROXIDE® Alu C, AEROXIDE® Alu C 805	0.1-0.3 0.1-0.3 0.1-0.3 0.1-0.3 0.1-0.3 0.1-0.3	<ul style="list-style-type: none"> Free flow additive Anti-caking (prevention of moisture pick-up)
Thermoplastic Powders	AEROSIL® R 972, AEROSIL® R 812, AEROSIL® R 8200, AEROXIDE® Alu C, AEROXIDE® Alu C 805	0.1-0.3 0.1-0.3 0.1-0.3 0.1-0.3	<ul style="list-style-type: none"> Free flow additive Anti-caking (prevention of moisture pick-up)
Tribopowders	AEROXIDE® Alu C, AEROXIDE® Alu 130	0.1-0.3	<ul style="list-style-type: none"> Free flow additive Increase in electropositive charge (tribo)

Evaluated fumed silica and aluminium oxides

Product	Character	BET Surface Area (m²/g)	Tamped Density (g/L)	Surface Charges
AEROSIL® 200	Hydrophilic Silica	200 ± 25	50	Negative
AEROSIL® R 812	Hydrophobic Silica	260 ± 30	60	Negative
AEROSIL® R 972	Hydrophobic Silica	110 ± 20	50	Negative
AEROXIDE® ALU C	Hydrophilic Aluminium Oxide	100 ± 15	50	Positive
AEROXIDE® ALU C 805	Hydrophobic Aluminium Oxide	100 ± 15	50	Slightly positive
AEROXIDE® ALU 130	Hydrophilic Aluminium Oxide	130 ± 20	50	Positive

HYDROPHOBING AGENTS

TEGO® Phobe products are used to make waterborne exterior paints hydrophobic. Used in silicone resin paints in small amounts, TEGO® Phobe 1650 or TEGO® Phobe 1670 is characterized by low water absorption.



Hydrophobing Agents

Product	Waterborne	Solventborne	Hydrophobing	Water-beading effect	Impregnation	Primer	Silicone resin paints and plasters	Silicate emulsion paints and plasters	Printing inks	Remark
TEGO® Phobe 1401	
TEGO® Phobe 1409 ¹	for ecolabel compliant formulations
TEGO® Phobe 1500 N	
TEGO® Phobe 1505		
TEGO® Phobe 1650	
TEGO® Phobe 1659 ¹	for ecolabel compliant formulations, excellent early water resistance
TEGO® Phobe 6510				
TEGO® Phobe 6600				

¹ new



ANTI-GRAFFITI ADDITIVES

TEGO® Protect provides polyurethane coatings with anti-graffiti and easy to clean characteristics. This range of products can be used in solvent or waterborne coatings.

Anti-Graffiti Additives

Product	Dosage	Applications/effect
TEGO® Protect 5000 N	1–3 %	for matte, unpigmented and/or pigmented formulations, especially good release properties
TEGO® Protect 5001	2–5 %	for clear coats, marked water-beading effect, high solvent resistance
TEGO® Protect 5100 N	2–8 %	for waterborne 2-pack PU anti-graffiti coatings



Other Additives

Product	Waterborne	UV	Solventborne	Solvent-free	Adhesion promoter	Hammer finish	Reduced drying-up	Anti-static
ADDID® 230	•		•	•				•
ADDID® 900¹	•	•	•		•			
ADDID® 911	•		•	•	•			
TEGO® Hammer 501¹	•		•			•		
TEGO® Humectant 7000	•						•	

¹ containing silicone



CO-BINDERS

TEGO® VariPlus

TEGO® VariPlus products are widely compatible hard resins used as co-binders in paints, lacquers, printing inks and other inks. They not only increase the solids content and accelerate drying speed but also improve numerous properties such as hardness, gloss and film build.



TEGO® VariPlus

Product	Waterborne	UV	Solventborne	Adhesion to metal	Adhesion to plastic	Hardness	Gloss	Viscosity reduction/ increased solids content	Drying time	Pigment wetting and stabilization	Remark
TEGO® VariPlus 1201 TF			●		●	●	●		●	●	formaldehyde-free, free of tin-organic components
TEGO® VariPlus 3350 UV		●		●	●		●				in tripropylene glycol diacrylate
TEGO® VariPlus AP		●	●	●			●	●			formaldehyde-free, solid
TEGO® VariPlus CA			●	●			●	●	●		solid
TEGO® VariPlus DS 50	●				●	●	●	●	●	●	formaldehyde-free, aqueous emulsion, free of organic solvents
TEGO® VariPlus LK ^{1,2}			●	●	●		●	●		●	
TEGO® VariPlus SK		●	●	●	●	●	●	●	●		formaldehyde-free, solid
TEGO® VariPlus TC			●	●			●	●		●	solid, very wide compatibility and solubility

¹new ²silicone-free

TEGO® AddBond

The **TEGO® AddBond** range of products comprises special, widely compatible polyester resins which improve the adhesion of the most diverse coating and printing ink formulations.



TEGO® AddBond

Product	Waterborne	UV	Solventborne	Adhesion to metal	Adhesion to plastic	Hardness	Flexibility	Fixation of aluminum pigments	Remark
TEGO® AddBond LP 1600 ^{1,2}		●	●	●	●		●	●	
TEGO® AddBond LP 1611 ^{1,2}		●	●	●	●		●	●	
TEGO® AddBond LTH		●	●	●		●		●	solid
TEGO® AddBond LTW			●	●	●		●	●	
TEGO® AddBond LTW-B			●	●	●		●	●	
TEGO® AddBond 1270	●		●	●	●		●		after neutralization suitable for waterborne formulations, good acrylate compatibility
TEGO® AddBond 2220 ND			●	●	●		●	●	especially suitable for alkyd systems
TEGO® AddBond HS			●	●	●		●		especially suitable for high solids coatings
TEGO® AddBond 2325			●	●	●		●		especially suitable for thermoplastic acrylic enamels
TEGO® AddBond DS 1300	●			●	●		●	●	aqueous emulsion, free of organic solvents

¹ new ² silicone-free

SPECIALTY BINDERS

SILICONE-EPOXY RESINS

The product group **SILIKOPON®** and the product **SILIKOFTAL® ED** are silicone-epoxy hybrid systems which combine the advantages of both technologies.

The coatings are highly resistant to chemicals and exhibit high color fastness as well as excellent gloss retention during outdoor use.



Silicone-Epoxy Resins

Product	Non-volatile content	Remark
SILIKOPON® EF	98 %	for 2-pack isocyanate-free curable high solids top coats with a low VOC content (100-250 g/l), with good corrosion, excellent gloss, weathering resistance, and anti-graffiti effect
SILIKOFTAL® ED	100 %	for 2-pack isocyanate-free curable high solids top coats with a low VOC content (100-250 g/l), with good corrosion, weathering resistance, and anti-graffiti effect
SILIKOPON® EC	53 %	stoving system, solventborne, for stoving enamels (heat resistant up to 650°C, depending on formulation), excellent adhesion, and resistance to solvents
SILIKOPON® EW	53 %	stoving system, solventborne, for stoving enamels (heat resistant up to 650°C, depending on formulation), excellent adhesion, and resistance to solvents

SILICONE RESINS

Heat resistance up to 650 °C

(formulation-dependent)

SILIKOPHEN® products consist of methyl and phenyl-methyl silicone resins which, depending on the formulation, provide corrosion protection up to 650 °C. Applications include exhaust systems and combustion chambers.



Silicone Resins

Product	Non-volatile content	Active content	Remark
CURING SYSTEMS			
SILIKOPHEN® P 40/W	50 %		water reducible, good compatibility with organic resins
SILIKOPHEN® P 50/X	50%		solventborne, good air drying
SILIKOPHEN® P 80/X	80%		solventborne, good air drying, for low VOC formulations
AMBIENT CURING SYSTEMS			
SILIKOPHEN® AC 900	90 %		high solids, solventborne, ambient curing, good flexibility during the heating and the cooling process
SILIKOPHEN® AC 950¹	95 %		ethyl modified
SILIKOPHEN® AC 1000	100 %		solvent-free, ambient curing, good flexibility during the heating and the cooling process

¹ new

SILICONE-POLYESTER RESINS**Heat resistance up to 250 °C**

(formulation-dependent)

With products of the **SILIKOFTAL®** brand, Evonik offers a wide range of aromatic silicone-polyester resins tailored to meet specific customer requirements. The building blocks of the **SILIKOFTAL®** product range are chemically linked.

**Silicone-Polyester Resins**

Product	Silicone content	Properties
SILIKOFTAL® HTT	80 %	retains hardness from room temperature to 150 °C; long-term heat resistance to 250 °C; good detergent resistance. Currently listed under FDA 175.300 in cured solvent-free resins; conforms to FDA/BfR*.
SILIKOFTAL® HTS	70 %	very good resistance to yellowing up to 220 °C. Currently listed under FDA 175.300 in cured solvent-free resins; conforms to FDA/BfR*.
SILIKOFTAL® HTF	50 %	flexible and therefore to a limited extent may be deep drawn. Currently listed under FDA 175.300 in cured solvent-free resins; conforms to FDA/BfR*.
SILIKOFTAL® HTL	50 %	high gloss and low thermoplasticity. Currently listed under FDA 175.300 in cured solvent-free resins; conforms to FDA/BfR*.
SILIKOFTAL® HTL 2	50 %	high gloss, low thermoplasticity, good detergent resistance. Currently listed under FDA 175.300 in cured solvent-free resins; conforms to FDA/BfR*.
SILIKOFTAL® HTL 3	30 %	very good yellowing resistance up to 200 °C, very good boiling water resistance. Currently listed under FDA 175.300 in cured solvent-free resins; conforms to FDA/BfR*.
SILIKOFTAL® non-stick 60	60 %	for release coatings, properties similar to SILIKOFTAL® HTT (FDA/BfR)*

* Please note that the evaluation regarding suitability for food contact may change, you can find the latest status on our website www.coating-additives.com

HIGH SOLIDS SILICONE HYBRID RESINS

SILIKOTOP® is a binder system designed for use in high solids systems and top coats. It has a very low VOC content, processing viscosity, and solvent demand. **SILIKOTOP®** is also effective as co-binder.



High Solids Silicone Hybrid Resins

Product	Non-volatile content	Remark
SILIKOTOP® E 900¹	90 %	top coats, enhanced flexibility, tough elasticity
SILIKOTOP® E 901¹	90 %	top coats, excellent weather resistance, also for direct-to-metal applications

¹ new



SILICONE-MODIFIED POLYURETHANE EMULSION

Non-heat resistant

SILIKOPUR® is a waterborne, silicone-modified 1-pack polyurethane emulsion.

With SILIKOPUR® very flexible coating systems for a wide range of substrates such as leather, wood, plastic, rubber, and metal can be formulated.




Silicone-Modified Polyurethane Emulsion

Product	Non-volatile content	Remark
SILIKOPUR® 8081	33 %	waterborne silicone modified polyurethane emulsion, high flexibility



REACTIVE SILICONE-BASED RESIN COMPONENTS

The **TEGOMER®** range of products consists of linear, reactive polydimethylsiloxanes with various terminal functional groups. These are specially developed for modifying binders, such as polyurethanes, acrylic resins, polyesters and epoxides.

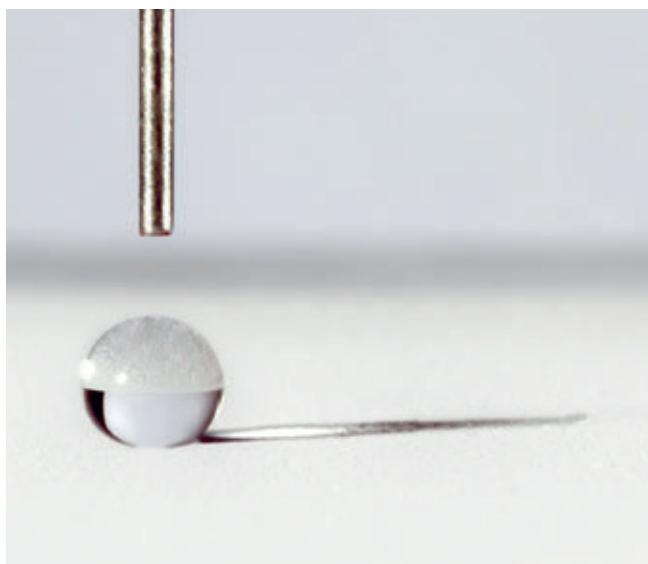

Reactive Silicone-Based Resin Components

Product	Non-volatile content	Remark
TEGOMER® E-Si 2330	100 %	diepoxyalkylpolydimethylsiloxane
TEGOMER® D 3403	100 %	1,3 polyetherdiol EO/PO 100/0
TEGOMER® H-C 5002	100 %	Hydroxy functional polyacrylate



NANORESINS

NANOCRYL® – SILICA NANOCOMPOSITES FOR THE MODIFICATION OF RADIATION-CURING COATINGS

Evonik's silica nanocomposites are colloidal silica sols in various binders and solvents. These are low viscosity products that are highly transparent and do not exhibit any sedimentation.

The fact that this can be achieved without impairing optical clarity makes silica nanocomposites particularly suitable for highly scratch-resistant, steel wool-resistant clear coats for plastics (e.g. PC, PMMA, PET) and wood.

Product Overview/Technical Data

Product	Monomer	Characterization	SiO ₂ -content [w/w%]	Dynamic viscosity, 25 °C [mPa·s]
NANOCRYL® C 130	CTFA	trimethylol propane formal acrylate	50	275
NANOCRYL® C 140	HDDA	hexanediol diacrylate	50	175
NANOCRYL® C 150	TMPTA	trimethylol propane triacrylate	50	3,300
NANOCRYL® C 153-10	TMPEOTA	ethoxylated trimethylol propane triacrylate	50	1,000
NANOCRYL® C 165	PPTTA	alkoxylated pentaerythritol tetraacrylate	50	2,500



ALBIDUR® – SILICONE ELASTOMER PARTICLES FOR THE MODIFICATION OF COATINGS

ALBIDUR® products can be used to modify the fracture toughness of a formulation without affecting the modulus or glass transition temperature and without markedly increasing the viscosity of the mixture.



Product Overview/Technical Data

Product	Silicone content [w/w%]	Base resin	Dynamic viscosity, 25°C [mPa·s]	Comments
ALBIDUR® EP 2240 A	40	DGEBA	35,000	EEW: 300 g/equiv.
ALBIDUR® PU 5640	40	PPG-triol	2,500	hydroxyl value: 230
ALBIDUR® 1223^{1,2}	0	α - Ω -trialcoxysilane terminated aliphatic urethane	30,000	

¹ new ² silicone-free

This information and all further technical advice are based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. In particular, no warranty, whether express or implied, or guarantee of product properties in the legal sense is intended or implied. We reserve the right to make any changes according to technological progress or further developments.

The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Performance of the product described herein should be verified by testing, which should be carried out only by qualified experts in the sole responsibility of a customer. Reference to trade names used by other companies is neither a recommendation, nor does it imply that similar products could not be used.

AEROSIL®/ACEMATT®
Evonik Resource Efficiency
GmbH

Rodenbacher Chaussee 4
63457 Hanau
Germany
Phone +49 6181 59-12532
Fax +49 6181 59-7112532
ask-si@evonik.com

TEGO®
Evonik Resource Efficiency
GmbH

Goldschmidtstraße 100
45127 Essen
Germany
Phone +49 201 173-2222
Fax +49 201 173-1939
info-tego@evonik.com

SURFYNOL®/DYNOL™/
AIRASE®

Evonik Materials
Netherlands BV
Kanaalweg 15,
3502 GD Utrecht
Netherlands
Phone +31-30-2857100
apcse@evonik.com

ACEMATT®, ADDID®,
AEROSIL®, AIRASE®,
ALBIDUR®, CARBOWET®,
DYNOL™, NANOCRYL®,
SILIKOFTAL®, SILIKOPHEN®,
SILIKOPON®, SILIKOPUR®,
SILIKOTOP®, SURFYNOL®,
TEGO®, TEGOMER®,
ZETASPERSE® are registered
trade marks of **EVONIK**
INDUSTRIES AG
or one of its subsidiary
companies and are written in
capital letters.