

Anti-caking effect in powdered or granulated fertilizers

SIPERNAT® D 17, the hydrophobic free flow and anti-caking agent for the agricultural industry

The preparation of soil with adequate fertilizer products before and during cultivation is a critical factor for a high-yield harvest. The concentration and correct dosage per hectare of a high-quality fertilizer is one of the basic factors for a successful crop season. An addition of hydrophobic SIPERNAT® D 17 improves the flowability as well as the long-term stability by its anti-caking performance and ensures a lump free, uniform fertilizer

distribution. Thus SIPERNAT® D 17 contributes to a more effective and efficient use of fertilizers enabling a more sustainable and environmentally responsible application.




How can SIPERNAT® D 17 help to improve long-term stability of powdered or granulated fertilizers?

SIPERNAT® D 17 ...

- builds up a protective layer between the host powder and the environment.
- prevents further moisture up-take of the host powder during production or storage.
- is hydrophobic and therefore not wettable by water.
- reduces caking behavior, the powder or granules remain free flowing and free of lumps after transport and storage.
- improves free flow properties, that leads to a more accurate dosing .
- needs much lower dosage to achieve the same free flow and caking properties compared to hydrophilic silica.
- increases productivity thus saving costs.
- makes a fertilizer easier to handle at customers' site and to apply in the soil.

Example long-term stability improvement with SIPERNAT® D 17

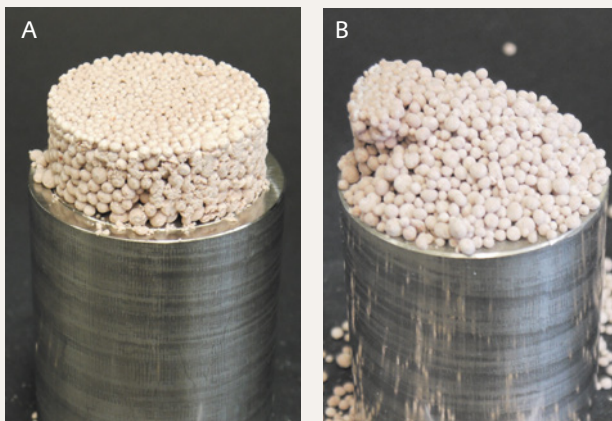

A) NPK fertilizer without silica addition after 8 days storage in the climatic chamber

B) NPK fertilizer containing 0.3% SIPERNAT® D 17 after 8 days storage in the climatic chamber

Table 1: Applications of SIPERNAT® D 17 in fertilizer

Your application	SIPERNAT® D 17
NPK Fertilizer (powdered/granulated)	highly recommended
NP Fertilizer (powdered/granulated)	highly recommended
NK Fertilizer (powdered/granulated)	highly recommended
Ammonium Sulphate	recommended
Urea	recommended

Conclusion

SIPERNAT® D 17 prevents caking of fertilizers on a sustainable basis, improves the flowability as well and enables convenient handling for you and your customers. With an addition of only 0.3% SIPERNAT® D 17 a significant improvement can be achieved. Thus, the effective use of SIPERNAT® D 17 also contributes to a more controlled distribution of fertilizer thereby providing benefits in multiple parts of the process; production, storage and application in the field.

Table 2: Properties of SIPERNAT® D 17

Properties	Unit	SIPERNAT® D 17
Particle size d50 , Laser diffraction according to ISO 13320	µm	10.0
Loss on drying , 2 h at 105 °C according to ISO 787-2	%	≤ 6.0
Loss on ignition , 2 h at 1000 °C ¹ according to ISO-3262-1	%	≤ 6.0
pH-value , 5% in water/methanol 1:1 according to ISO 787-9	–	8.0
Tamped density* , not sieved according to ISO 787-11	g/l	150
SiO₂ content² , according to ISO 3262-19	%	≥ 97
Wettability by methanol , (internal method)	%	≥ 52
Carbon content , method ISO 3262-19	%	1.7

¹ based on dry substance (2h/105 °C) ² based on ignited substance (2h/1000 °C) * explant

The given data are typical values. Specification on request.

This information and any recommendations, technical or otherwise, are presented in good faith and believed to be correct as of the date prepared. Recipients of this information and recommendations must make their own determination as to its suitability for their purposes. In no event shall Evonik assume liability for damages or losses of any kind or nature that result from the use of or reliance upon this information and recommendations. EVONIK EXPRESSLY DISCLAIMS ANY REPRESENTATIONS AND WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO THE ACCURACY, COMPLETENESS, NON-INFRINGEMENT, MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE (EVEN IF EVONIK IS AWARE OF SUCH PURPOSE) WITH RESPECT TO ANY INFORMATION AND RECOMMENDATIONS PROVIDED. Reference to any trade names used by other companies is neither a recommendation nor an endorsement of the corresponding product, and does not imply that similar products could not be used. Evonik reserves the right to make any changes to the information and/or recommendations at any time, without prior or subsequent notice.

AEROSIL® and SIPERNAT® are registered trademarks of Evonik Industries or one of its subsidiaries.

Europe/Middle-East/ Africa/Latin America

Evonik Resource Efficiency GmbH

Business Line Silica
Rodenbacher Chaussee 4
63457 Hanau
Germany

PHONE +49 6181 59-12532
FAX +49 6181 59-712532
ask-si@evonik.com

North America

Evonik Corporation

Business Line Silica
299 Jefferson Road
Parsippany, NJ 07054-0677
USA

PHONE +1 800 233-8052
FAX +1 973 929-8502
ask-si-nafta@evonik.com

Asia Pacific

Evonik (SEA) Pte. Ltd.

Business Line Silica
3 International Business Park
#07-18, Nordic European Centre
Singapore 609927

PHONE +65 6 809-6877
FAX +65 6 809-6677
ask-si-asia@evonik.com