


# SABO® STAB UV 94

Hindered amine light stabilizer (HALS) for plastics

# Plastic Additives

## COMPOSITION

Chemical structure

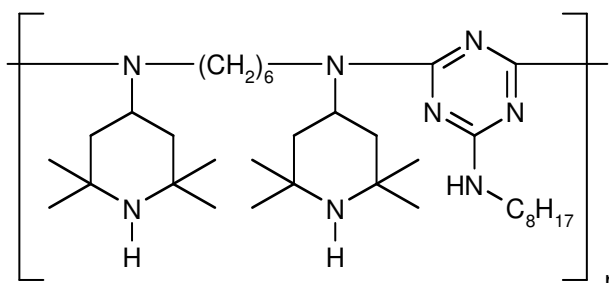

Chemical name

1,6-Hexanediamine, N,N'-bis(2,2,6,6-tetramethyl-4-piperidiny)-, polymer with 2,4,6-trichloro-1,3,5-triazine, reaction products with 2,4,4-trimethyl-2-pentanamine

CAS number

71878-19-8  
70624-18-9 (USA)

## TYPICAL PROPERTIES

Appearance	Colorless to light yellowish pastilles
Bulk density	530-590 kg/m <sup>3</sup>
Molecular weight	2000-3100 g/mol
Softening range	100-135°C
Average particle size	1 mm

## FEATURES

- Excellent light stabilization performance in polyolefins (thin- and thick-section)
- Contributes to the thermal oxidative stability of polyolefins
- Low volatility and excellent resistance to migration
- Extensive food contact clearances

## APPLICATIONS

SABO® STAB UV 94 is a polymeric hindered amine light stabilizer (HALS) which is effective in a broad range of polymers and applications. The product is particularly useful in PE applications (injection molding, film, and tape), PP (injection molding, film, and fibers), TPO, polyamide fibers, flexible and rigid PVC, styrenic TPE's, polyurethanes, and specialty adhesive applications. It is also suitable for use in xylene XLDPE.

## GUIDELINES FOR USE

Typical addition levels for SABO®STAB UV 94 range from 0.05-1%, depending upon the application. The exact level to be used in any particular application should be determined in an appropriate testing program.

The product shows a performance synergy with other light stabilizers, including low molecular weight HALS (e.g. SABO®STAB UV 70, SABO®STAB UV 91), high molecular weight HALS (especially SABO®STAB UV 62), benzoates, and UV absorbers.

## SOLUBILITY DATA (g/100 g solution, 20°C)

Acetone	>50	n-Hexane	41
Chloroform	>30	Methanol	3
Ethanol	<0.1	Toluene	>50
Ethyl acetate	>50	Water	<0.01

## PACKAGING

25 kg PE bag (500 kg to pallet) or 500 kg BULK Bag; Pallet type : CP3

## HANDLING & STORAGE

Please consult the Safety Data Sheet prior to handling or using this product.

If properly stored in a dry place at temperatures below 25°C, SABO®STAB UV 94 remains within the specification limits for at least 5 years.

## REGISTRATIONS

SABO®STAB UV 94 is listed on the following national chemical inventories:

AICS (Australia)	IECSC (China)
DSL (Canada)	NZIoC (New Zealand)
ECL (Korea)	PICCS (Philippines)
ENCS (Japan)	TSCA (USA)

This product has been cleared in the EU, USA, and other countries for use in plastic materials and articles intended to come in contact with food. Please contact your Sabo representative for further information.

Additional information on SABO®STAB UV 94 is available on request from your Sabo representative, including compliance with norms and regulations in the EU, USA, and other countries.

The following supersedes Buyer's Documents. Sabo makes no representation or warranty, express or implied, including of merchantability or fitness for a particular purpose. No statements herein are to be construed as inducements to infringe any relevant patent. Under no circumstances shall Sabo be liable for incidental, consequential or indirect damages for alleged negligence, breach of warranty, strict liability, tort or contract arising in connection with the product(s). Buyer's sole remedy and Sabo's sole liability for any claims shall be Buyer's purchase price. Data and results are based on controlled or lab work and must be confirmed by Buyer by testing for its intended conditions of use. The product(s) has not been tested for, and is therefore not recommended for, uses for which prolonged contact with mucous membranes, abraded skin, or blood is intended; or for uses for which implantation within the human body is intended.